




Profesjonalne Systemy  
Oświetlenia LED

NEW  
GENERATION  
LED

Technology and  
innovation

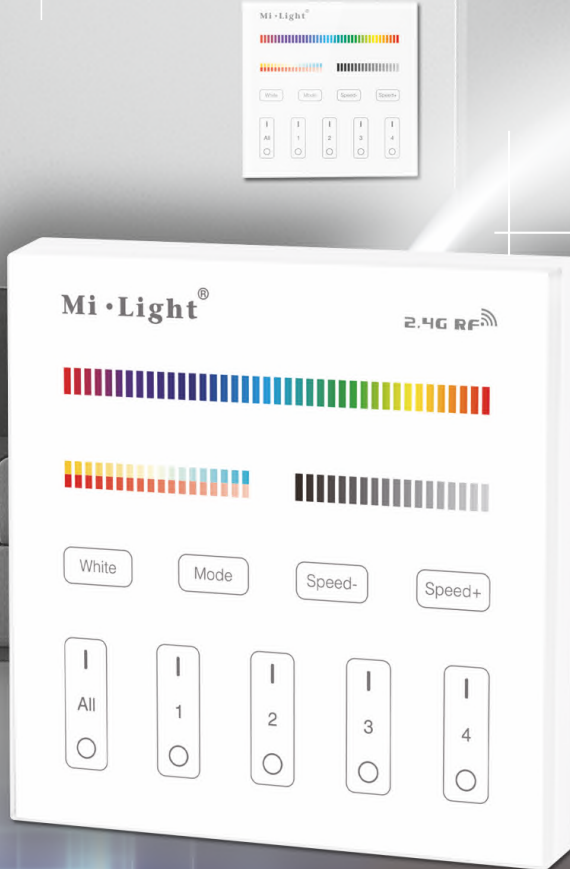




SYSTEMY  
STEROWANIA  
BEZPRZEWODOWEGO



# SMART Panel Controller

The appearance is made of a pretty and fashionable glass panels. And we adopt a high precision Capacitive touch screen IC. Touch Screen is very stable.

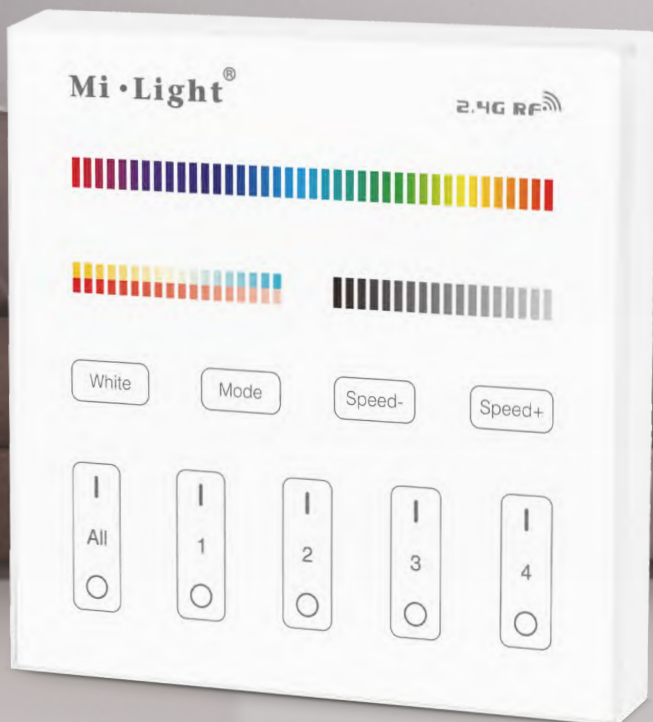








# PANEL

## Remote Controller

B Series



T Series



The appearance is made of a pretty and fashionable glass panel









## Features

This Panel Remote Controller is designed by a delicated and fashionable tempered glass panel; And we adopt a high precision Capacitive touch screen IC. Touch Screen is very stable; 2.4Ghz high RF wireless control with long distance controlling, low power consumption and high speed transmitting rate. This product has T series and P series, and the difference is the method of power supplying. Both series have 4 kinds: T1/B1 4-zone Brightness dimming panel remote controller; T2/B2 4-zone CCT panel remote controller; T3/B3 4-zone RGB/RGBW panel remote controller; T4/B4 4-zone RGB+CCT panel remote controller. This product widely work on our smart LED Lighting, LED Controller and Smart panel controller, etc.

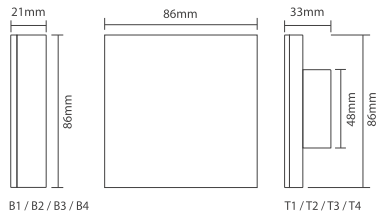

## Parameters

Model No.	Power	Input	Transmission Frequency	Modulation Method	Control Distance	Size
B1 / B2 / B3 / B4	Transmitting Power: 6dBm Standby Power Consumption: 10uA	3V (2*AAA Battery)	2.4Ghz	GFSK	30m	86*86*21mm
T1 / T2 / T3 / T4	Transmitting Power: 6dBm Standby Power Consumption: 10uA	AC90-120V / AC180-240V	2.4Ghz	GFSK	30m	86*86*33mm




### 4-Zone Single Color Panel Remote Controller Model No.: B1 / T1

- Brightness Dimming
- Individued 4-zone group lighting separately, no bulb qty limited
- Adopt a high precision capacitive touch screen IC, touch screen is very stable




### 4-Zone Dual White Panel Remote Controller Model No.: B2 / T2

- Dimmable and color temperature adjustable
- Individued 4-zone group lighting separately, no bulb qty limited
- Adopt a high precision capacitive touch screen IC, touch screen is very stable



### 4-Zone RGBW Panel Remote Controller Model No.: B3 / T3

- RGB+W Color changing, brightness & saturation control, 9 modes switching
- Individued 4-zone group lighting separately, no bulb qty limited
- Adopt a high precision capacitive touch screen IC, touch screen is very stable



### 4-Zone RGB+CCT Panel Remote Controller Model No.: B4 / T4

- Dimmable & color temperature adjustable, color changing & saturation control 9 modes switching
- Individued 4-zone group lighting separately, no bulb qty limited
- Adopt a high precision capacitive touch screen IC, touch screen is very stable





# WiFi iBox

## Compatible with all Mi-light 2.4GHz series

iBox is an upgraded WiFi box for Mi-light series, which is an exquisite light itself. The APP has new UI faces, and new functions. With easy link to the wifi router, you will be able to control the lights anywhere.



### App Long Distance Control

With WiFi & Smart phone APP, you can control the lights anywhere, compatible with iOS, Android 4.3 or above.



### Compatibility

2.4GHz RF Chip, compatible with all Mi-light series.



### Color Changing & Dimmable

16 Millions of colors to choose, Brightness Dimming




### Timer Function


Automatic ON/OFF with timer function




Model No.	Power	Input	Protocol	Control Distance
iBox1	2W	Micro USB DC5V / 500mA	2.4GHz, WiFi 802.11b / g / n	30m



## Long Distance Control:




Smart Phone



Home Router



WiFi Controller At Home



Mi-Light 2.4GHz Series Product



### APP Download

Search Miiight from Apple store, or scan the code shown on the left.

Search Miiight from Google Play store, or scan the code shown on the left. ( Android 4.3 or above.)



NEW  
GENERATION  
LED

Technology and  
innovation







# 4 IN 1 Smart LED Controller Instruction

2.4GHz RF remote controllable, WiFi enabled smart phone control. Dimmable & color temperature adjustable color changing & saturation control. With the function of automatic signal transmitting, one can send signal to another, which makes the distance limitless.



**99-Zone**  
One remote can control many track lights at the same time or individually, totally up to 99-zone, up to 9999 lights.



**2.4GHz RF Transmission Tech**  
Low power consumption, long distance control, anti-interference, and high communication speed.



**Optional: RGBW / Dual White / Single White**  
Dimmable & Color temperature Adjustable, Color Changing & Saturation Control.



**Smart phone App control**  
Mi-Light WiFi iBox is needed

Model No.	Input	Output	Working Temperature	Control Distance	Size
LS1	DC12V-24V	Max. 6A/Channel Total output Max.15A	-20-60°	30m	138*22.5*35mm



Remote Controller  
Model No.: ISR090



APP control  
WiFi iBox is needed



### 4-Zone Single Color LED Strip Controller

- Brightness Dimming
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control (Mi-Light WiFi iBox is needed)



Compatible Remote: **ISR006** **ISR091**

Model No.	Input	Output	Control Distance	Size
ISR036	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm



### 4-Zone Dual White LED Strip Controller

- Dimmable & color temperature adjustable
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control (Mi-Light WiFi iBox is needed)



Model No.	Input	Output	Control Distance	Size
ISR035	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm



### 4-Zone RGB LED Strip Controller

- RGB color changing & brightness dimmable
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control (Mi-Light WiFi iBox is needed)



Compatible Remote: **ISR092** **ISR095**

Model No.	Input	Output	Control Distance	Size
ISR037	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm



### 4-Zone RGBW LED Strip Controller

- RGB+W Color changing & Brightness Dimmable
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control (Mi-Light WiFi iBox is needed)



Compatible Remote: **ISR092** **ISR095**

Model No.	Input	Output	Control Distance	Size
ISR038	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm



### 4-Zone RGB+CCT LED Strip Controller

- Dimmable & color temperature adjustable, color changing & saturation control.
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control (Mi-Light WiFi iBox is needed)



Compatible Remote: **ISR092**

Model No.	Input	Output	Control Distance	Size
ISR039	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm



# LED Strip Light Control System

Color Temperature Series



Compatible Remote:

ISR006

ISR091





## RGB LED Strip Control System

- RGB color changing & brightness dimmable
- 2.4GHz RF remote controllable
- Smart phone APP control (Mi-Light WiFi iBox is needed)



Model No.	Input	Output	Control Distance	Size
ISR020	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm Remote: 114*55.5*21.5mm



## Single Color LED Strip Control System

- Brightness Dimmable
- 2.4GHz RF remote controllable
- Smart phone APP control (Mi-Light WiFi iBox is needed)



Model No.	Input	Output	Control Distance	Size
ISR021	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm Remote: 114*55.5*21.5mm



## Dual White LED Strip Control System

- Dimmable & Color temperature Adjustable
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control (Mi-Light WiFi iBox is needed)



Model No.	Input	Output	Control Distance	Size
ISR022	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm Remote: 114*55.5*21.5mm



## Touch RGB LED Strip Control System

- RGB Color changing & Brightness Dimmable
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control (Mi-Light WiFi iBox is needed)




Model No.	Input	Output	Control Distance	Size
ISR025	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm Remote: 110*53*20.5mm



## Touch RGBW LED Strip Control System

- RGB+W Color changing & Brightness Dimmable
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control (Mi-Light WiFi iBox is needed)



Model No.	Input	Output	Control Distance	Size
ISR027	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm Remote: 114*55.5*21.5mm



## RGBW Auto Transmitting&Synchronizing LED Strip Control System

- RGB+W Color changing & Brightness Dimmable
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control (Mi-Light WiFi iBox is needed)



Model No.	Input	Output	Control Distance	Size
ISR028	DC12V-24V	Max. 6A/Channel Total output Max.10A	30m	Controller: 85*45*22.5mm Remote: 114*55.5*21.5mm



## 2.4 Ghz LED Spotlight






### GU10 RGB+CCT LED Spotlight

- Dimmable & color temperature adjustable color changing & saturation control
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control, long distance control (Mi-Light WiFi iBox is needed)



Compatible Remote: ISR092 ISR095

Model No.	Power	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	PF	Beam angle
ISR103	4W	AC86-265V 50-60Hz	2700-6500K	250-280LM	70LM/W	>80	0.55	25°

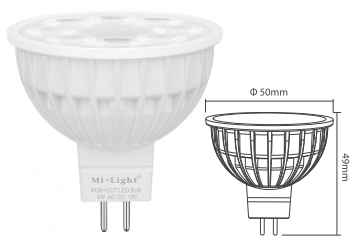


### MR16 RGB+CCT LED Spotlight

- Dimmable & color temperature adjustable color changing & saturation control
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control, long distance control (Mi-Light WiFi iBox is needed)



Compatible Remote: ISR092 ISR095

Model No.	Power	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	Beam angle
ISR104	4W	AC/DC 12V	2700-6500K	250-280LM	70LM/W	>80	25°



### MR16 RGBW LED Spotlight

- RGB+W Color changing, brightness & saturation control
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control, long distance control (Mi-Light WiFi iBox is needed)



Compatible Remote: ISR095

Model No.	Power	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	Beam angle
ISR008	5W	AC/DC 12V	WW(2700-3200K) CW(6000-6500K)	440-490LM	85-90LM/W	>80	30°



### GU10 Dual White LED Spotlight

Model No.: ISR011  
 Power: 5W  
 Voltage: AC86-265V / 50-60Hz  
 Kelvin: 2700-6500K  
 Luminous Flux: 440-490LM  
 Luminous Efficiency: 85-90LM/W  
 CRI: >80  
 PF: 0.65  
 Beam Angle: 30°  
 Compatible Remote:



### GU10 RGBW LED Spotlight

Model No.: ISR018  
 Power: 5W  
 Voltage: AC86-265V / 50-60Hz  
 Kelvin: WW(2700-3200K) CW(6000-6500K)  
 Luminous Flux: 440-490LM  
 Luminous Efficiency: 85-90LM/W  
 CRI: >80  
 PF: 0.65  
 Beam Angle: 30°  
 Compatible Remote:








# SMART LED Light Bulb

2.4GHz RF remote controllable  
Smart phone APP long distance control  
(Mi-Light WiFi iBox is needed)




## E14 RGBW LED Light Bulb

- RGB+W Color changing, brightness & saturation control
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control, long distance control (Mi-Light WiFi iBox is needed)



Compatible Remote: ISR092 ISR095 ISR098

Model No.	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	PF	Beam angle	Base Type
ISR013	AC86-265V 50-60Hz	WW(2700-3200K) CW(6000-6500K)	350-370LM	75LM/W	>80	0.65	240°	E14 / E27



## RGBW LED Light Bulb


Model No.: ISR014  
Power: 6W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: WW(2700-3200K) CW(6000-6500K)  
Luminous Flux: 450-470LM  
Luminous Efficiency: 80LM/W  
CRI: >80  
PF: 0.65  
Beam Angle: 180°  
Base Type: E26 / E27 / B22  
Compatible Remote:



## Dual White LED Light Bulb

Model No.: ISR017  
Power: 6W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: 2700-6500K  
Luminous Flux: 450-470LM  
Luminous Efficiency: 80LM/W  
CRI: >80  
PF: 0.65  
Beam Angle: 180°  
Base Type: E26 / E27 / B22  
Compatible Remote:






### RGB+CCT LED Light Bulb

- Dimmable & color temperature adjustable, color changing & saturation control.
- 2.4GHz RF remote controllable, control distance within 30 meters
- Smart phone APP control, long distance control (Mi-Light WiFi iBox is needed)



Compatible Remote: ISR092

Model No.	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	PF	Beam angle	Base Type
ISR015	AC86-265V 50-60Hz	2700-6500K	500-550LM	70LM/W	>80	0.65	230°	E26 / E27 B22



### RGBW LED Light Bulb

Model No.: ISR016  
 Power: 9W  
 Voltage: AC86-265V / 50-60Hz  
 Kelvin: WW(2700-3200K) CW(6000-6500K)  
 Luminous Flux: 800-850LM  
 Luminous Efficiency: 93LM/W  
 CRI: >80  
 PF: 0.65  
 Beam Angle: 180°  
 Base Type: E26 / E27 / B22  
 Compatible Remote:



ISR092    ISR095    ISR098

### Dual White LED Light Bulb

Model No.: ISR019  
 Power: 9W  
 Voltage: AC86-265V / 50-60Hz  
 Kelvin: 2700-6500K  
 Luminous Flux: 800-850LM  
 Luminous Efficiency: 93LM/W  
 CRI: >80  
 PF: 0.65  
 Beam Angle: 180°  
 Base Type: E26 / E27 / B22  
 Compatible Remote:



ISR006    ISR091




# SMART LED Downlight

2.4GHz RF remote controllable  
Smart phone APP long distance control  
(MI-Light WIFI IBox is needed)




## 6W Dual White LED Downlight

Model No.: ISR060  
Power: 6W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: 2700-6500K  
Luminous Flux: 510-560LM  
Luminous Efficiency: 90LM/W  
CRI: >75  
Beam Angle: 120°  
PF: >0.6  
Control Distance: 30m  
Size:  $\Phi 102 \times 66$ mm  
Hole Size: 79-95mm  
Compatible Remote:




## 12W Dual White LED Downlight

Model No. ISR061  
Power: 12W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: 2700-6500K  
Luminous Flux: 1100LM  
Luminous Efficiency: 88LM/W  
CRI: >80  
Beam Angle: 120°  
PF: >0.65  
Control Distance: 30m  
Size:  $\Phi 144 \times 78$ mm  
Hole Size: 125-140mm  
Compatible Remote:



## 12W RGBW LED Downlight

Model No.: ISR067  
Power: 12W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: WW(2700-3200K) / CW(6000-6500K)  
Luminous Flux: 1100LM  
Luminous Efficiency: 88LM/W  
CRI: >80  
Beam Angle: 120°  
PF: >0.65  
Control Distance: 30m  
Size:  $\Phi 144 \times 78$ mm  
Hole Size: 125-140mm  
Compatible Remote:








# RGB+CCT LED Downlight

2.4GHz RF remote controllable, WiFi enabled smart phone control.  
Dimmable & color temperature adjustable, color changing & saturation control.  
4 unique zones, individual light control, you can control different rooms individually.




## 12W RGB+CCT LED Downlight

Model No.: ISR066  
Power: 12W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: 2700-6500K  
Luminous Flux: 1100LM  
Luminous Efficiency: 88LM/W  
CRI: >80  
Beam Angle: 120°  
PF: >0.65  
Control Distance: 30m  
Size:  $\Phi 180 \times 40$ mm  
Hole Size: 145-150mm



## 6W RGB+CCT LED Downlight

Model No.: ISR068  
Power: 6W  
Voltage: AC86-265V / 50-60Hz  
Kelvin: 2700-6500K  
Luminous Flux: 550-600LM  
Luminous Efficiency: 85LM/W  
CRI: >80  
Beam Angle: 120°  
PF: >0.6  
Control Distance: 30m  
Size:  $\Phi 118 \times 38$ mm  
Hole Size: 90-95mm



ISR092




# PIR wireless control system

PIR sensor switch is a wireless switch, easy use and installation without wiring with the lights, the sensing distance can reach 8 meters.





**2.4G Wireless control, No wiring**  
 One switch can sense many lights at the same time  
 (Control Distance 30m, the sensing distance can reach 8 meters)

**Automatic Commands Transmitting Function**  
 Mi-light PIR lighting series can send to each other the commands from the sensor switch, which makes the sensing distance limitless. (The signal transmitting distance from one light to another can reach 30 meters)

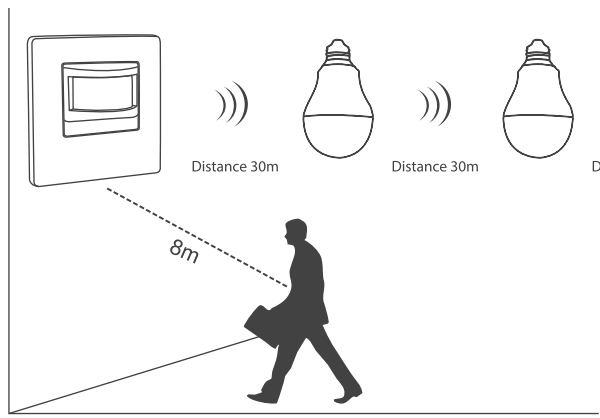

**One switch can sense many lights**  
 One switch can sense many lights at the same time


**Many switches can sense the same light**  
 One PIR bulb can be controlled no more than 20 sensor switches

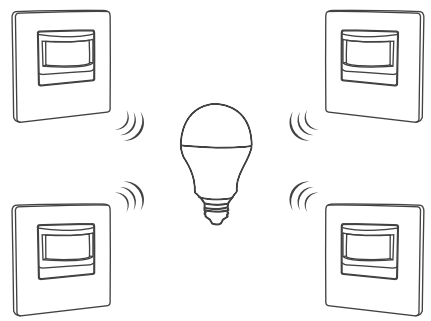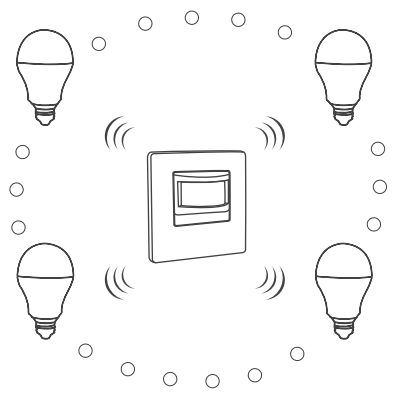



### PIR Wireless Sensor Switch

- PIR sensor switch is a wireless switch, easy use and installation without wiring with the lights, the sensing distance can reach 8 meters.
- The PIR lamps have the function of automatic signal transmitting, the lamps can send each other signal within 30 meters, which makes the sensing




Model No.	Voltage	Sensing Angle	Control Distance	Sensing Distance	Size
ISRP034	AC180-240V/50Hz/0.01A or AC90-120V/60Hz/0.02A	110°	30m	Max.8m	86*86*47mm



### PIR LED Light Bulb (6W)

- 2.4GHz radio frequency
- This product cannot work alone, it works with the PIR sensor switch
- Receiving distance can reach as long as 30 meters




Model No.	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	PF	Beam angle	Base Type
ISRP01	AC86-265V 50-60Hz	WW(2700-3200K) CW(6000-6500K)	450-470LM	80LM/W	>80	0.65	180°	E26 / E27 B22



### PIR LED Downlight (12W)

- 2.4GHz Radio frequency
- This product cannot work alone, it works with the PIR sensor switch
- Receiving distance can reach as long as 30 meters




Model No.	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	PF	Beam angle	Hole Size
ISRP02	AC86-265V 50-60Hz	WW(2700-3200K) CW(6000-6500K)	1100LM	88LM/W	>80	0.65	120°	Φ145-150mm



### PIR LED Floodlight

- 2.4GHz Radio frequency
- This product cannot work alone, it works with the PIR sensor switch
- Receiving distance can reach as long as 30 meters

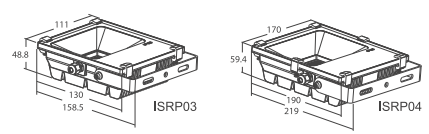

Model No.	Power	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	PF	Beam angle	IP Rate
ISRP03	10W	AC86-265V 50-60Hz	WW(2700-3200K) CW(6000-6500K)	1000LM	100LM/W	>80	≥0.65	160°	IP65
ISRP04	20W	AC86-265V 50-60Hz	WW(2700-3200K) CW(6000-6500K)	2000LM	100LM/W	>80	≥0.9	160°	IP65



# DMX512 Series Wireless Control

By adopting the 2.4G global ISM frequency, the data is more reliable and has no delay during the transmitting




## DMX 512 LED Transmitter

DMX512 LED transmitter can send standard DMX512 protocol data by wireless.


It is used to transmit the wireless data between DMX512 control panel and our DMX512 light bulb or led strip light controller series.

By adopting the 2.4G global ISM frequency, the data is more reliable and has no delay during the transmitting.

Model No.	Power	Input	Frequency	Transmitting Method	Distance	Size
ISRD01	6dBm	DC5V / 500mA	2400-2483.5MHz	GFSK	30m	188*47*23mm

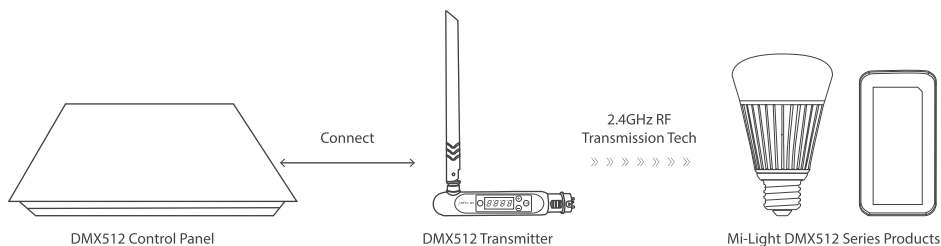






## DMX512 RGB+CCT Strip Controller

- 16 million colors to choose, Brightness Dimming , color temperature and saturation.
- DMX 512 LED transmitter & 2.4GHz RF remote controllable,
- Control distance within 30 meters
- Smart phone APP control, long distance control (Mi-Light WiFi iBox is needed)



Compatible Remote: ISR092

Model No.	Input	Output	Control Distance	Size
ISRD02	DC12-24V	Max. 6A/Channel Total output Max.10A	30m	85*45*22.5mm



## DMX512 RGB+CCT LED Light Bulb

- 16 million colors to choose, Brightness Dimming , color temperature and saturation.
- DMX 512 LED transmitter & 2.4GHz RF remote controllable,
- Control distance within 30 meters
- Smart phone APP control, long distance control (Mi-Light WiFi iBox is needed)



Compatible Remote: ISR092

Model No.	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	PF	Beam angle	Base Type
ISRD03	AC86-265V 50-60Hz	2700-6500K	500-550LM	70LM/W	>80	0.65	230°	E26 / E27 B22




# Alpha Lite

The ONE and ONLY smart LED track light manufacturer worldwide 2.4GHz RF remote controllable, WiFi enabled, Angles adjustable with RF remote



- 99-Zone**  
One remote can control many track lights at the same time or individually, totally up to 99-zone, up to 9999 lights.
- Directions**  
Rotating directions freely, horizontal 350; vertical 180; all your needs can be realized by remote control.
- Optional: RGBW / Dual White / Single White**  
Dimmable & Color temperature Adjustable, Color Changing & Saturation Control.
- 2.4GHz RF Transmission Tech**  
Low power consumption, long distance control, anti-interference, and high communication speed.
- Memory**  
You can save and choose color, and the direction of the tracklights.
- LCD Screen**  
With the LCD screen, you can see the color rate, kelvin, saturation rate, brightness clearly.
- Smart phone App control**  
Mi-Light WiFi iBox is needed

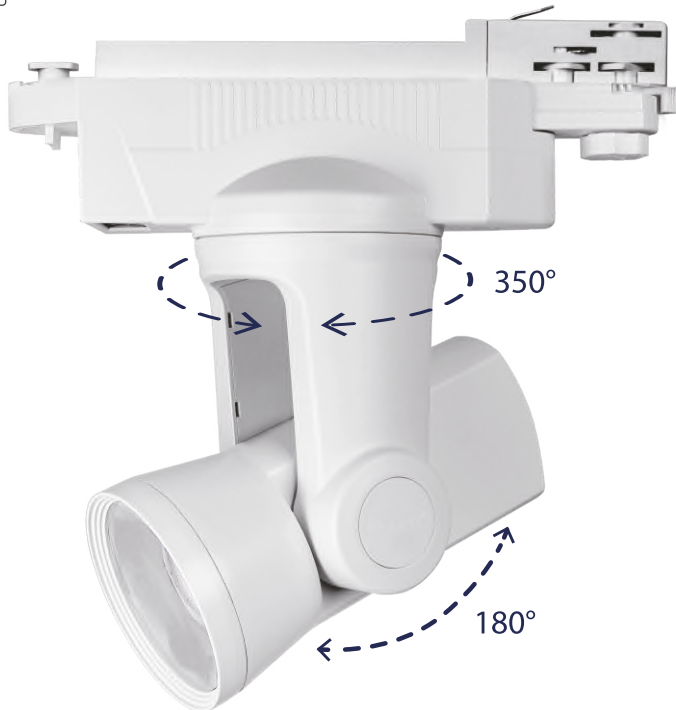

## Alpha lite (Single White)

Model No.: AL1(2-wire) / AL4(4-wire)  
 Power: 25W  
 Voltage: AC86-265V / 50-60Hz  
 Kelvin: 2700-3200K / 6000-6500K  
 Luminous Flux: 2000LM  
 Luminous Efficiency: 85LM/W  
 CRI: >90  
 Beam Angle: 30°  
 PF: >0.9  
 Material: Aluminum+Transparent lens  
 Control Distance: 30m

## Alpha lite (Dual White)

Model No.: AL2(2-wire) / AL5(4-wire)  
 Power: 25W  
 Voltage: AC86-265V / 50-60Hz  
 Kelvin: 2700-6500K  
 Luminous Flux: 2200LM  
 Luminous Efficiency: 90LM/W  
 CRI: >80  
 Beam Angle: 30°  
 PF: >0.9  
 Material: Aluminum+Transparent lens  
 Control Distance: 30m

## Alpha lite (RGBW)

Model No.: AL3(2-wire) / AL6(4-wire)  
 Power: 25W  
 Voltage: AC86-265V / 50-60Hz  
 Kelvin: 2700-3200K / 6000-6500K  
 Luminous Flux: 2020LM  
 Luminous Efficiency: 85LM/W  
 CRI: >80  
 Beam Angle: 30°  
 PF: >0.9  
 Material: Aluminum+Transparent lens  
 Control Distance: 30m




Horizontal 350° Rotating




Vertical 180° Rotating



Digital Screen



2-wire



4-wire



Remote Controller  
Model No.: ISR090



APP control  
WiFi iBox is needed



NEW GENERATION LED

Technology and innovation



350°

350°




ISR092



ISR095


### 25W 2-wire RGBW Rail Tracklight

Model No.:ISRW01  
 Power: 25W  
 Voltage: AC86-265V / 50-60Hz  
 Kelvin: WW(2700-3200K) / CW(6000-6500K)  
 Luminous Flux: 2000LM  
 Luminous Efficiency: 83LM/W  
 CRI: >80  
 PF: >0.92  
 Beam Angle: 30°  
 Wire Type: 2-wire  
 Rotating Angle: Horizontal 350° & Vertical 350°  
 Control Distance: 30m



### 25W 4-wire RGBW Rail Tracklight

Model No.: ISRW02  
 Power: 25W  
 Voltage: AC86-265V / 50-60Hz  
 Kelvin: WW(2700-3200K) / CW(6000-6500K)  
 Luminous Flux: 2000LM  
 Luminous Efficiency: 83LM/W  
 CRI: >80  
 PF: >0.92  
 Beam Angle: 30°  
 Wire Type: 4-wire  
 Rotating Angle: Horizontal 350° & Vertical 350°  
 Control Distance: 30m





One remote can control many track lights at the same time or individually, totally up to 99-zone, up to 9999 lights.

## Remote Control for LED Tracklight

Dimmable & Color temperature Adjustable, Color Changing & Saturation Control. Directions Adjustable with RF Remote, Directions or Colors can be saved. 99-zone, Control Distance 30 Meters.



**99-Zone**  
One remote can control many track lights at the same time or individually, totally up to 99-zone, up to 9999 lights.



**Directions**  
Directions Adjustable with RF Remote.



**RGB+CCT**  
Dimmable & Color temperature Adjustable, Color Changing & Saturation Control.




**2.4GHz RF Transmission Tech**  
Low power consumption, long distance control, anti-interference, and high communication speed.



**Memory**  
You can save and choose RGB color, kelvin, brightness, saturation rate and the direction of the tracklights.



**LCD Screen**  
With the LCD screen, you can see the color rate, kelvin, saturation rate, brightness clearly.



## Parameters

Model No.: ISR090	Frequency: 2400-2483.5MHz
Mode: GFSK	Power Consumption: 6dBm
Voltage: 4.5V(Sevtion 3 Battery)	Standby Power Consumption: 30uA
Control Distance: 30m	Size: 195mm*72.8mm*18.4mm







### 4-Zone Rotating Wheel Remote Control Model No.: ISR006

- Dimmable and color temperature adjustable
- Included 4-zone group lighting separately, no bulb qty limited



### 4-Zone RGB+CCT Remote Controller Model No.: ISR092

- Dimmable & color temperature adjustable, color changing & saturation control
- Included 4-zone group lighting separately, no bulb qty limited



### 4-Zone Touch Dual White Remote Control Model No.: ISR091

- Dimmable and color temperature adjustable
- Included 4-zone group lighting separately, no bulb qty limited



### 4-Zone RGBW Remote Control With Button Model No.: ISR095

- RGB+W Color changing, brightness & saturation control
- Included 4-zone group lighting separately, no bulb qty limited



### (Sunset Version) Dual White Remote Control Model No.: ISR093

- Dimmable and color temperature adjustable
- Compatible with reading, coffee and sunset mode, M1-M3 is for self-setting the mode



### Touch RGB Remote Control Model No.: ISR098

- Dimmable and color temperature adjustable, control distance 30m
- Included 4-zone group lighting separately, no bulb qty limited

## Remote Control Parameters

Model No.	Power	Voltage	Transmission Frequency	Modulation Method	Control Distance
ISR006 / ISR091 / ISR092 ISR093 / ISR095 / ISR098	Power Consumption: 6dBm Standby Power Consumption: 20uA	3V(Sevion 2 Battery)	2.4GHz	GF5K	30m





# SMART LED Floodlight

2.4GHz RF remote controllable  
Smart phone APP long distance control  
(MI-Light WiFi IBox is needed)




## Automatic Commands Transmitting Function

One floodlight can send the commands from the remote control to another, which makes the control distance limitless. (The distance from one light to another has to be within 30m)



Alloy Waterproof Plug



Professional Heat Sink Design




Bracket Details

## RGBW LED Floodlight



2.4GHz RF remote controllable, WiFi enabled smart phone control. RGB+W Color changing, brightness & saturation control. With the function of automatic signal transmitting, one can send signal to another, which makes the distance limitless.

Model No.	Power	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	Beam Aluminum	PF	IP Rate
ISR01	35W	AC86-265V 50-60Hz	WW(2700-3200K) CW(6000-6500K)	2500LM	83LM/W	>80	160°	>0.9	IP65

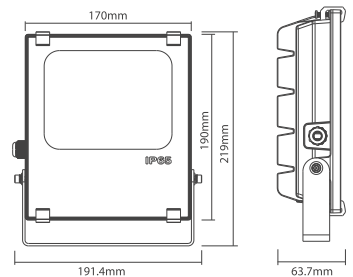




ISR082

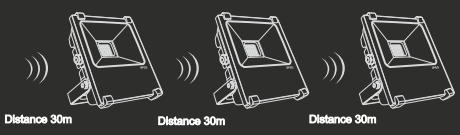

Alloy Waterproof Plug



Professional Heat Sink Design




Bracket Details

## RGB+CCT LED Floodlight

2.4GHz RF remote controllable, WiFi enabled smart phone control. Dimmable & color temperature adjustable color changing & saturation control. With the function of automatic signal transmitting, one can send signal to another, which makes the distance limitless.

Model No.	Power	Voltage	Kelvin	Luminous Flux	Light Efficiency	CRI	Beam Aluminum	PF	IP Rate
ISR02	50W	AC86-265V 50-60Hz	2700-6500K	3500-4000LM	80LM/W	>80	160°	>0.9	IP65



Technology and  
innovation



# Profesjonalne Systemy Oświetlenia LED



NEW  
GENERATION  
**LED**

[www.isrlight.com](http://www.isrlight.com)