


# HIGHBAY GEN 5



Technology and innovation



NEW GENERATION LED


Technology and innovation

[www.isrlight.com](http://www.isrlight.com)

# HIGHBAY GEN 5

## Technical Parameters(PC MASK):

|                           |                                   |             |             |
|---------------------------|-----------------------------------|-------------|-------------|
| System Power Usage        | 100 W±5%                          | 150 W±5%    | 200 W±5%    |
| Certification             | ETL/DLC4.2/FCC/CE/RoHS/TUV/SAA    |             |             |
| Lumen Output              | 13,000lm                          | 19,500lm    | 26,000lm    |
| Luminous efficiency       | 130lm/w                           |             |             |
| Led Brand                 | SAMSUNG                           |             |             |
| Input Voltage             | 100-277VAC                        |             |             |
| Power Frequency           | 50-60Hz                           |             |             |
| Power Factor              | > 0.93                            |             |             |
| Total Harmonic Distortion | < 15%                             |             |             |
| Dimmable                  | Yes(optional)                     |             |             |
| CCT                       | 3000K, 4000K, 5000K, 5700K, 6500K |             |             |
| CRI                       | > 80Ra                            |             |             |
| Beam Angle                | 60°/90°/120°                      |             |             |
| Finish                    | Black/White                       |             |             |
| PowerSupply               | LIFUD                             |             |             |
| Material                  | Aluminum                          |             |             |
| Operating Temperature     | (-30~+50℃)                        |             |             |
| Storage Temperature       | (-40~+70℃)                        |             |             |
| Operating Humidity        | 15-90%RH                          |             |             |
| Lifespan                  | 54000+Hours                       |             |             |
| Ingress Protection        | IP65                              |             |             |
| Net Weight                | 3.0KG±0.5                         | 3.3KG±0.5   | 3.3KG±0.5   |
| Gross Weight              | 3.9KG±0.5                         | 4.2KG±0.5   | 4.2KG±0.5   |
| Lamp Dimension            | Φ260*H127mm                       | Φ260*H130mm | Φ260*H130mm |
| Package Size              | L310*W310*H180mm                  |             |             |



NEW  
GENERATION  
LED

Technology and  
innovation


www.isrlight.com



# HIGHBAY GEN 5

## Technical Parameters(TOUGHENED GLASS MASK):

|                           |                                   |               |               |
|---------------------------|-----------------------------------|---------------|---------------|
| System Power Usage        | 100 W±5%                          | 150 W±5%      | 200 W±5%      |
| Certification             | ETL/DLC4.2/FCC/CE/RoHS/TUV/SAA    |               |               |
| Lumen Output              | 13,000lm                          | 19,500lm      | 26,000lm      |
| Luminous efficiency       | 130lm/w                           |               |               |
| Led Brand                 | SAMSUNG                           |               |               |
| Input Voltage             | 100-277VAC                        |               |               |
| Power Frequency           | 50-60Hz                           |               |               |
| Power Factor              | > 0.93                            |               |               |
| Total Harmonic Distortion | < 15%                             |               |               |
| Dimmable                  | Yes(optional)                     |               |               |
| CCT                       | 3000K, 4000K, 5000K, 5700K, 6500K |               |               |
| CRI                       | > 80Ra                            |               |               |
| Beam Angle                | 60°/90°/120°                      |               |               |
| Finish                    | Black/White                       |               |               |
| PowerSupply               | LIFUD                             |               |               |
| Material                  | Aluminum                          |               |               |
| Operating Temperature     | (-30~+50℃)                        |               |               |
| Storage Temperature       | (-40~+70℃)                        |               |               |
| Operating Humidity        | 15-90%RH                          |               |               |
| Lifespan                  | 54000+Hours                       |               |               |
| Ingress Protection        | IP65                              |               |               |
| Net Weight                | 3.3KG±0.5                         | 3.6KG±0.5     | 3.6KG±0.5     |
| Gross Weight              | 4.2KG±0.5                         | 4.5KG±0.5     | 4.5KG±0.5     |
| Lamp Dimension            | Φ260*H157.5mm                     | Φ260*H160.5mm | Φ260*H160.5mm |
| Package Size              | L310*W310*H200mm                  |               |               |






NEW GENERATION  
LED

Technology and  
innovation

www.isrlight.com

# HIGHBAY GEN 5

## Applications:

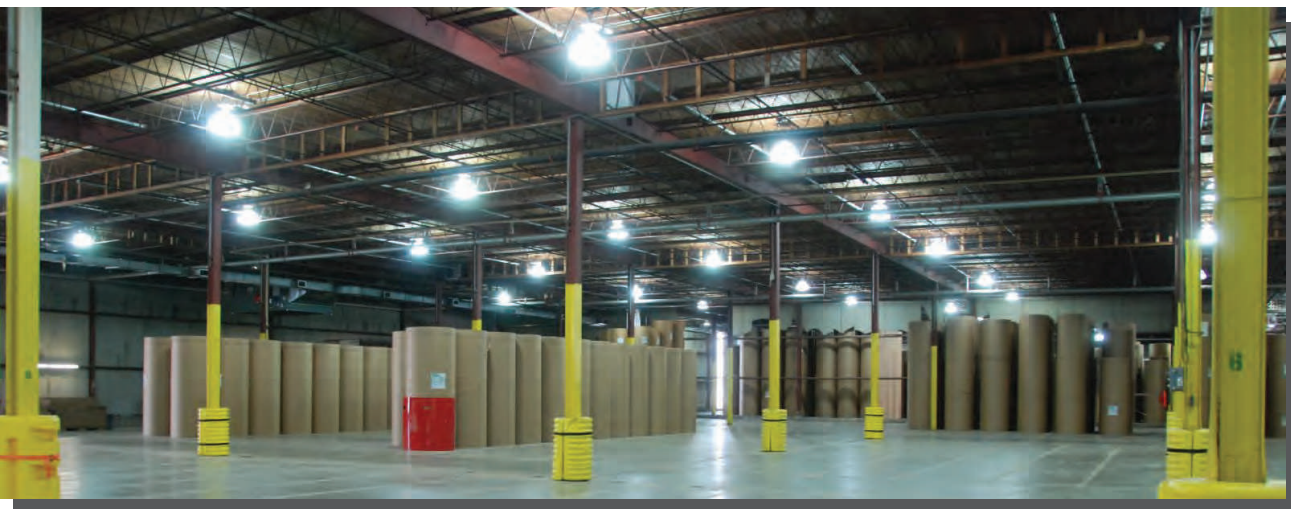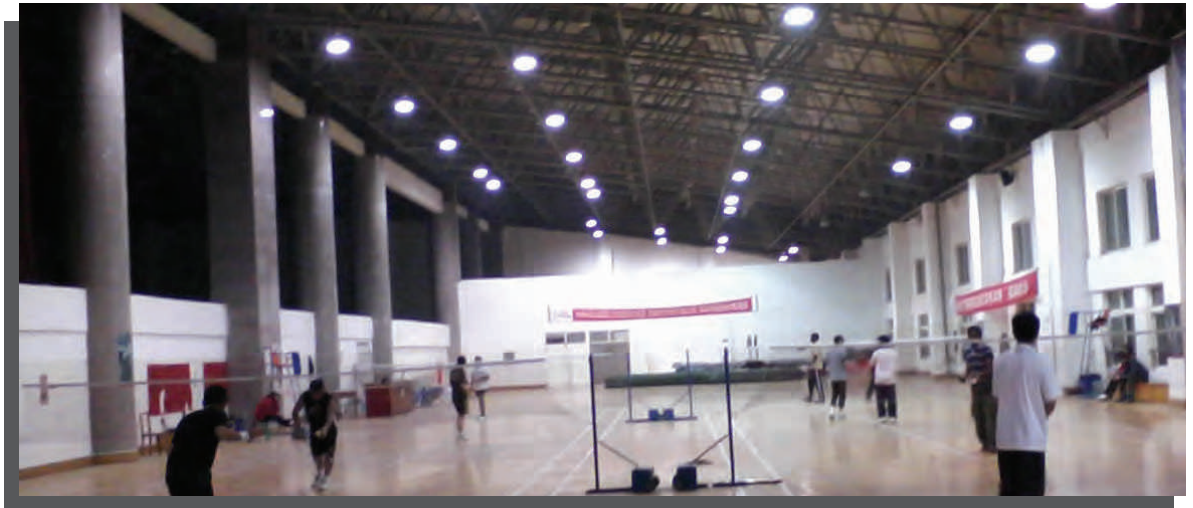

NEW  
GENERATION  
LED

Technology and  
innovation

[www.isrlight.com](http://www.isrlight.com)