



# HIGHBAY GEN 1

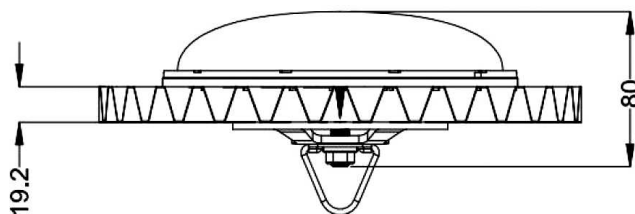

Model	Moc	Lm	Barwa	Kąt Świecenia	V	A/mA	Sprawność	CRI	IP	Diody	Szybkość	Trwałość	ON/OFF	Temp. Pracy
<b>HBU-G/1-50</b>	50W	5750	4000K 6500K	120°	190-260V AC	1000	0,99	>80	40	Epistar 2835LED	95%<1s	50000	≥50000	-30/+50
<b>HBU-G/1-80</b>	80W	9200	4000K 6500K	120°		1000	0,99	>80	40	Epistar 2835LED	95%<1s	50000	≥50000	-30/+50
<b>HBU-G/1-100</b>	100W	11500	4000K 6500K	120°		1000	0,99	>80	40	Epistar 2835LED	95%<1s	50000	≥50000	-30/+50



NEW  
GENERATION  
LED

Technology and  
innovation

www.isrlight.com