

## LINEAR LIGHT SERIES

Model	Lm	Moc	V	A/mA	Sprawność	Barwa	CRI	Kąt Świecenia	IP	Waga	Rozmiar	Szybkość	Trwałość	ON/OFF	Temp. Pracy
SL8050/018/4K	1600	18W	100-240V AC	1000	0,9	4500K	>80	120°	40	640g	80x50x606	95%<1s	50000	≥50000	-30/+50
SL8050/018/6K	1660	18W		1000	0,9	6500K	>80	120°	40	785g	80x50x606	95%<1s	50000	≥50000	-30/+50
SL8050/036/4K	3240	36W		1000	0,9	4500K	>80	120°	40	1140g	80x50x1204	95%<1s	50000	≥50000	-30/+50
SL8050/036/6K	3300	36W		1000	0,9	6500K	>80	120°	40	1390g	80x50x1204	95%<1s	50000	≥50000	-30/+50
SL8050/045/4K	4050	45W		1000	0,9	4500K	>80	120°	40	1400g	80x50x1504	95%<1s	50000	≥50000	-30/+50
SL8050/045/6K	4150	45W		1000	0,9	6500K	>80	120°	40	1725g	80x50x1504	95%<1s	50000	≥50000	-30/+50

1. Simple and modern design, screwless at end cap.




2. Extrusion aluminum lamp body and PC cover.



3. Smooth and soft lighting effect, no dark dot and shadow at the lighting area.








4. Various installation: Suspended, ceiling and recessed.



5. Three colors of lamp body, white, black and silver.



6. Continuous connection at max 550W run.

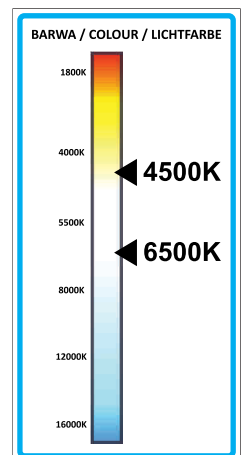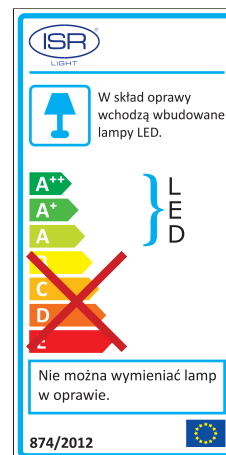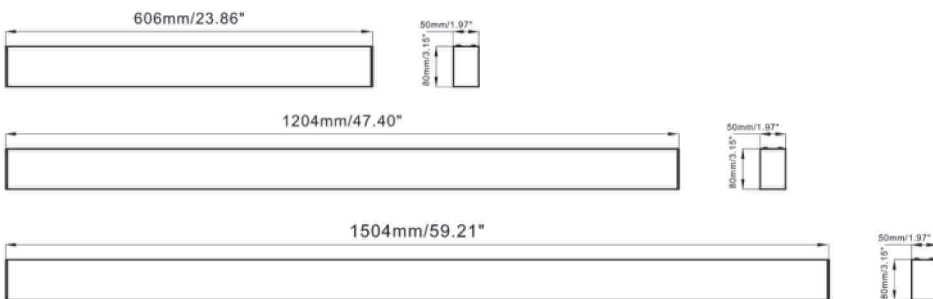

## LINEAR LIGHT SERIES

Model	Lm	Moc	V	A/mA	Sprawność	Barwa	CRI	Kąt Świecenia	IP	Waga	Rozmiar	Szybkość	Trwałość	ON/OFF	Temp. Pracy
SL10075/20/3K	1700	20W	100-240V AC	1000	0,9	3200K	>80	120°	40	640g	100x75x606	95%<1s	50000	≥50000	-30/+50
SL10075/20/4K	1900	20W		1000	0,9	4500K	>80	120°	40	785g	100x75x606	95%<1s	50000	≥50000	-30/+50
SL10075/20/6K	1920	20W		1000	0,9	6500K	>80	120°	40	1140g	100x75x606	95%<1s	50000	≥50000	-30/+50
SL10075/40/3K	3400	40W	100-240V AC	1000	0,9	3200K	>80	120°	40	640g	100x75x1200	95%<1s	50000	≥50000	-30/+50
SL10075/40/4K	3800	40W		1000	0,9	4500K	>80	120°	40	785g	100x75x1200	95%<1s	50000	≥50000	-30/+50
SL10075/40/6K	3840	40W		1000	0,9	6500K	>80	120°	40	1140g	100x75x1200	95%<1s	50000	≥50000	-30/+50
SL10075/50/3K	4250	50W	100-240V AC	1000	0,9	3200K	>80	120°	40	640g	100x75x1500	95%<1s	50000	≥50000	-30/+50
SL10075/50/4K	4750	50W		1000	0,9	4500K	>80	120°	40	785g	100x75x1500	95%<1s	50000	≥50000	-30/+50
SL10075/50/6K	4800	50W		1000	0,9	6500K	>80	120°	40	1140g	100x75x1500	95%<1s	50000	≥50000	-30/+50

1. Simple and modern design, screwless at end cap.




2. Extrusion aluminum lamp body and PC cover.



3. Smooth and soft lighting effect, no dark dot and shadow at the lighting area.



4. Various installation: Suspended, ceiling and recessed.



5. Three colors of lamp body, white, black and silver.



6. Continuous connection at max 550W run.

