



HIGHBAY MODULAR LIGHT

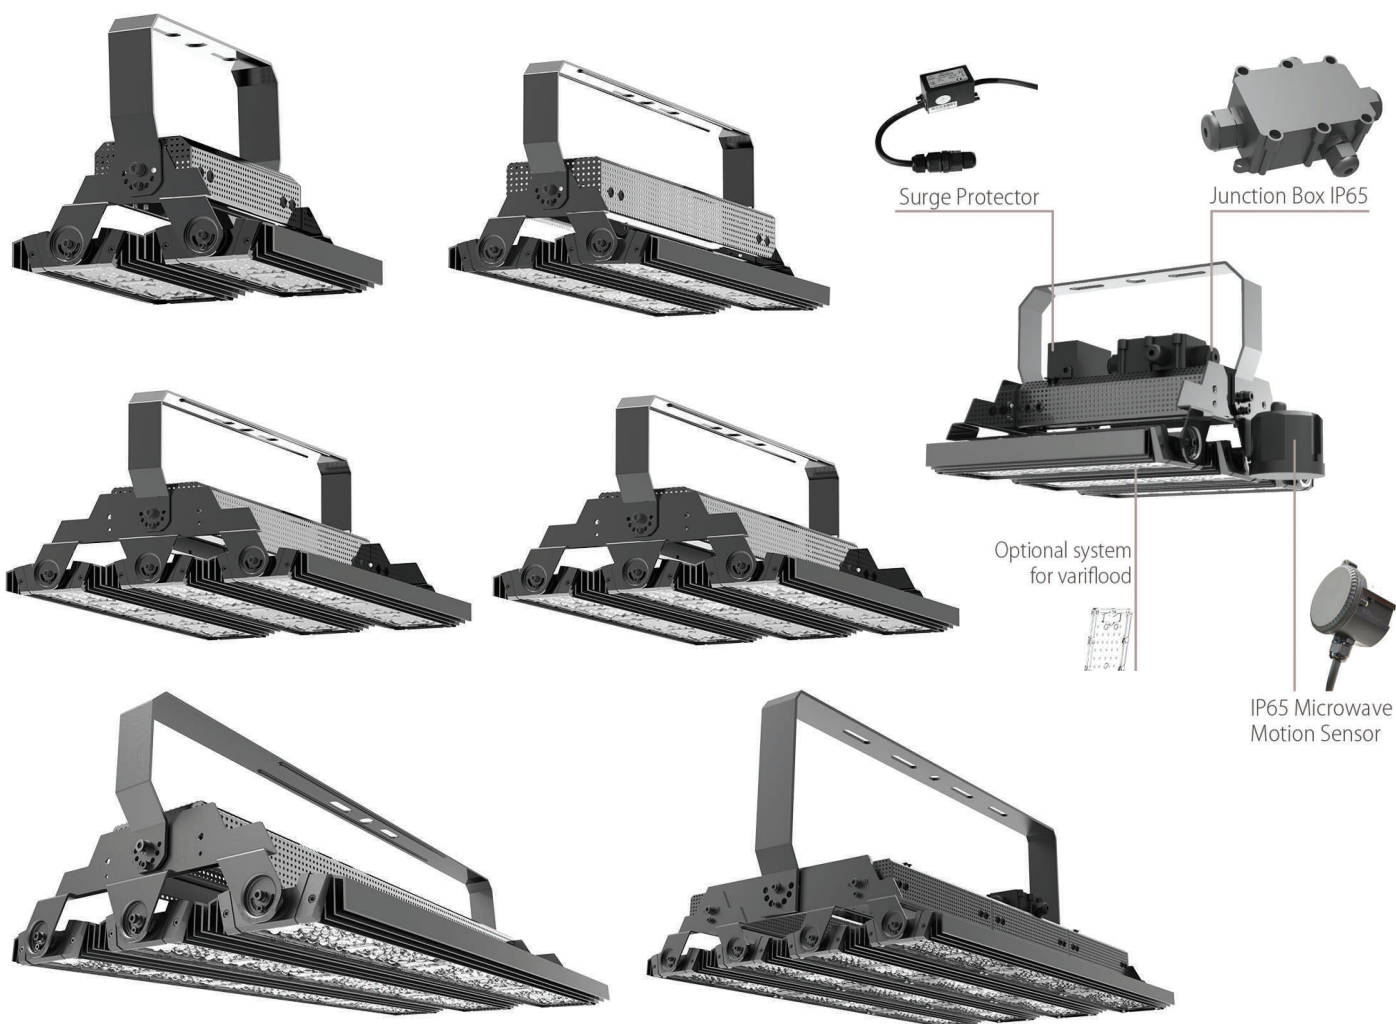

Model	Moc	Lm	Barwa	V	A/mA	Sprawność	CRI	Rozmiar	IP	Diody	Szybkość	Trwałość	ON/OFF	Temp. Pracy	
HBM-100	100W	13600 14000	4000K 5700K	220-240V AC	1000	0,95	>80	258x275x110	65	Philips	95%<1s	50000	≥50000	-30/+50	
HBM-150	150W	20400 21000	4000K 5700K		1000	0,95	>80	373x275x110	65	Philips	95%<1s	50000	≥50000	-30/+50	
HBM-200	200W	27200 28000	4000K 5700K		1000	0,95	>80	258x544x110	65	Philips	95%<1s	50000	≥50000	-30/+50	
HBM-300	300W	40800 42000	4000K 5700K		1000	0,95	>80	373x544x110	65	Philips	95%<1s	50000	≥50000	-30/+50	
HBM-400	400W	54400 56000	4000K 5700K		220-240V AC	1000	0,95	>80	258x755x110	65	Philips	95%<1s	50000	≥50000	-30/+50
HBM-450	450W	61200 63000	4000K 5700K			1000	0,95	>80	258x275x110	65	Philips	95%<1s	50000	≥50000	-30/+50
HBM-600	600W	81600 84000	4000K 5700K	1000		0,95	>80	516x755x110	65	Philips	95%<1s	50000	≥50000	-30/+50	



NEW
GENERATION
LED

Technology and
innovation

www.isrlight.com