



PANEL UL94V-2

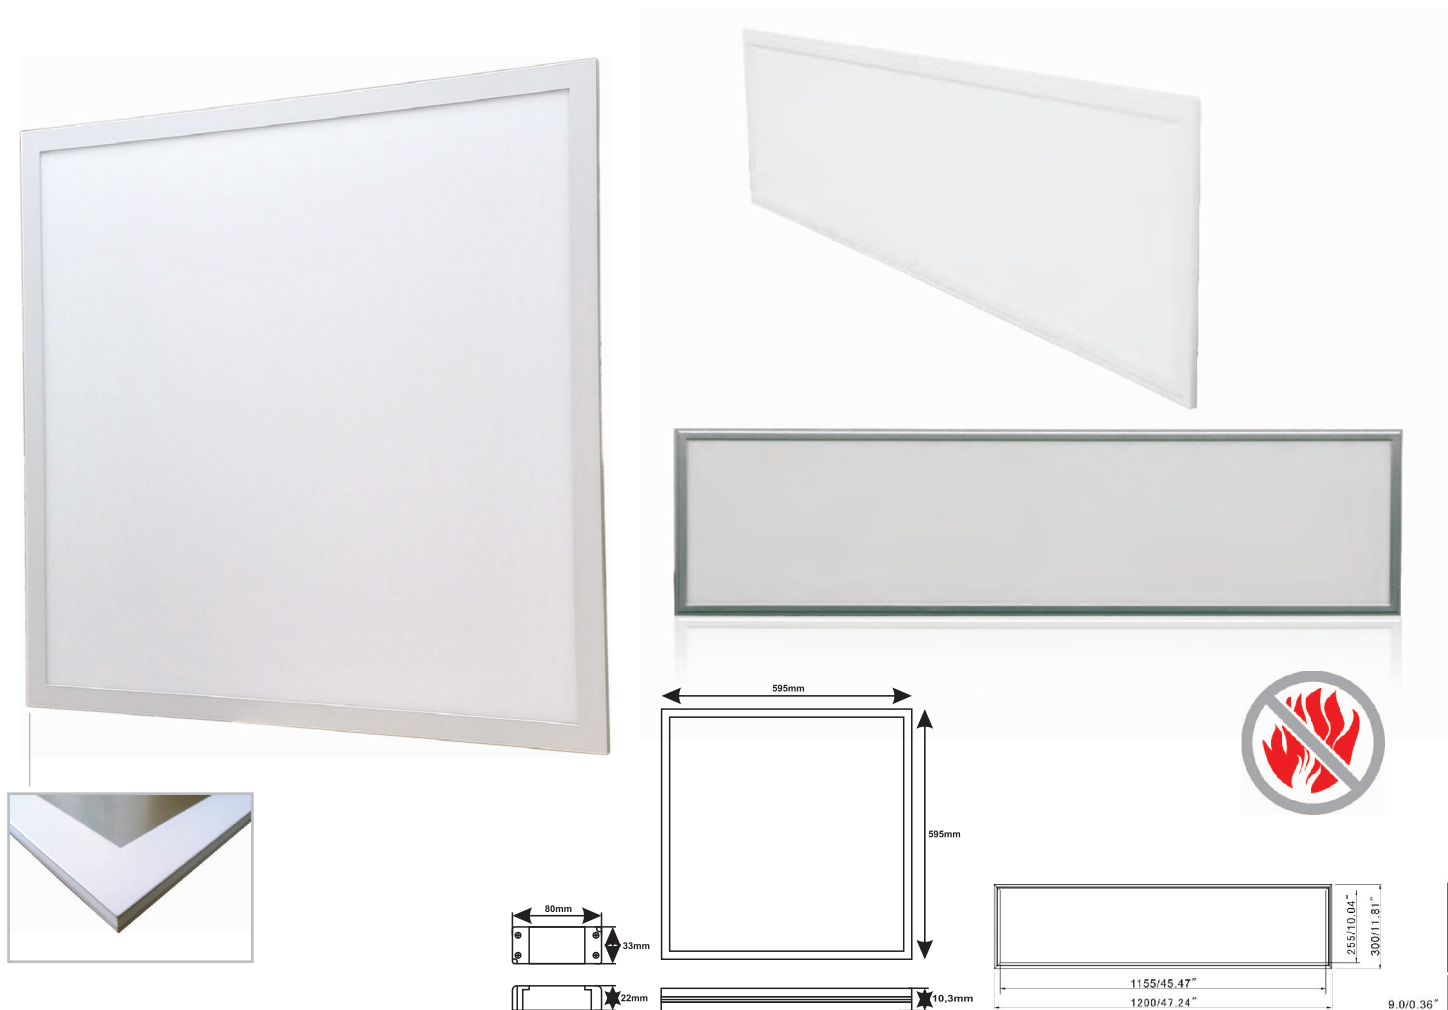

Model	Lm	Moc	V	A/mA	Sprawność	Barwa	CRI	Kąt Świecenia	IP	Waga	Rozmiar	Trwałość	ON/OFF	Temp. Pracy																						
P-UL3-3/18W/-LM/-K	1400	18W	100-240V AC	1000	0,9	4000K	>80	120°	20	4±0,3kg	29,5x29,5	50000	≥30000	-30/+50																						
	1440					5000K																														
P-UL6-3/22W/-LM/-K	1700	22W				100-240V AC									1000	0,9	4000K	>80	120°	20	4±0,3kg	59,5x29,5	50000	≥30000	-30/+50											
	1760																5000K																			
P-UL6-6/32W/-LM/-K	2496	32W															100-240V AC									1000	0,9	4000K	>80	120°	20	4±0,3kg	59,5x59,5	50000	≥30000	-30/+50
	2550																											5000K								
P-UL6-6/42W/-LM/-K	3275	42W	100-240V AC	1000	0,9		4000K	>80	120°	20	4±0,3kg	59,5x59,5	50000	≥30000														-30/+50								
	3360						5000K																													
P-UL12-3/32W/-LM/-K	2496	32W				100-240V AC	1000								0,9	4000K		>80	120°	20	4±0,3kg	1200x300	50000	≥30000	-30/+50											
	2550															5000K																				
P-UL12-3/42W/-LM/-K	3275	42W														100-240V AC	1000									0,9	4000K		>80	120°	20	4±0,3kg	1200x300	50000	≥30000	-30/+50
	3360																										5000K									
P-UL12-6/83W/-LM/-K	6470	83W	100-240V AC	1000	0,9			4000K	>80	120°	20	4±0,3kg	1200x600	50000													≥30000	-30/+50								
	6640							5000K																												

Aksesoria do montażu/ Mounting accessories




RAMKA/FRAME
RAS-RAM-ALU



KLIPS/MOUNTING CLIP
RAS-KLIP-G/K



ZESTAW MONTAŻOWY/MOUNTING KIT
RAS-LIN-4/1



NEW GENERATION
LED

Technology and
innovation

www.isrlight.com